


H07VK wiring wires

- According to standard NF C 32-201 – CEI 227-02 (H07) – DIN VDE 0281.
- H07VK 450 / 750V – Flexible bare copper core class 5 IEC 228.
- Insulation – YI1 mixture.
- Maximum conductor temperature: 70 ° C.

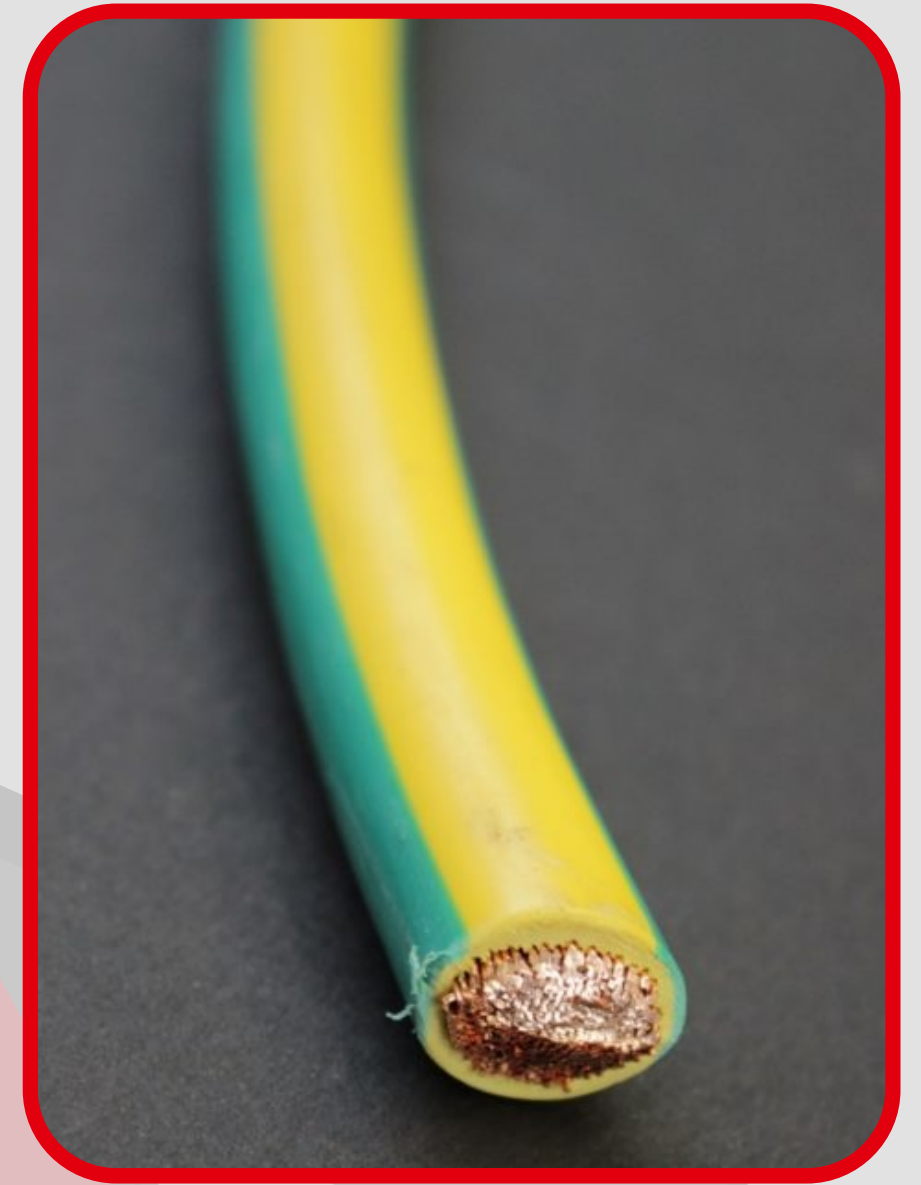

Reference	Section (mm ²)	Min diameter (mm)	Max diameter (mm)	Copper weight (Kg/km)	Mass (Kg/km)	Packaging
H07VK16-V/J	16	6.7	8.1	154	268	Drum/coil
H07VK25-V/J	25	8.4	10.2	240	363	Drum/coil
H07VK35-V/J	35	9.7	11.7	336	510	Drum/coil
H07VK50-V/J	50	11.5	13.9	480	700	Drum/coil
H07VK70-V/J	70	13.2	16.0	672	960	Drum/coil
H07VK95-V/J	95	15.1	18.2	912	1295	Drum/coil
H07VK120-V/J	120	16.7	20.2	1152	1590	Drum/coil

* Other sections possible on request