


H07VR wiring wires

- H07VR semi rigid wiring wires.
- According to standard NF C 32-201 – CEI 227-02 (H07) – DIN VDE 0281-3.
- H07VR 450 / 750V – Bare copper core wired class 2 IEC 228.
- PVC insulation.
- Maximum conductor temperature: 70 ° C.

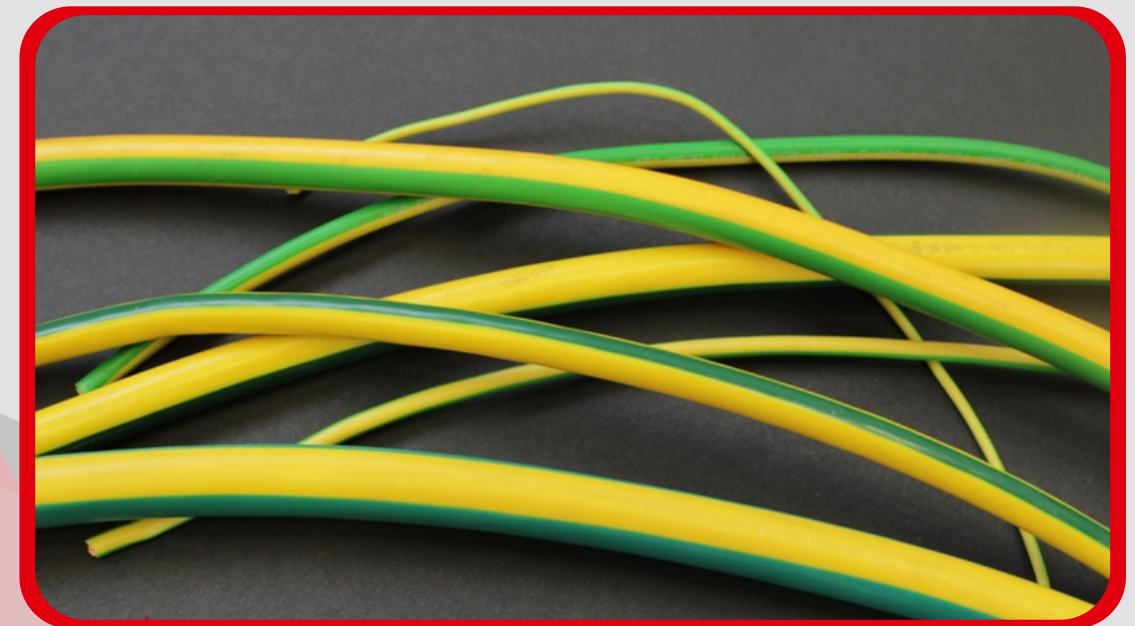

Reference	Number of strand	Min diameter (mm)	Max diameter (mm)	Copper weight (Kg/km)	Mass (Kg/km)	Packaging
H07VR16-V/J	7	6.4	7.9	154	165	Drum/coil
H07VR25-V/J	7	8.1	9.8	240	264	Drum/coil
H07VR35-V/J	7	9.0	11.0	336	360	Drum/coil
H07VR50-V/J	19	10.6	12.9	480	490	Drum/coil
H07VR70-V/J	19	12.1	14.8	672	720	Drum/coil
H07VR95-V/J	19	14.1	17.1	912	1015	Drum/coil
H07VR120-V/J	37	15.6	18.8	1152	1250	Drum/coil

* Other sections possible on request