


Equipotentiality bar on Omega

- 50×5 copper distribution strips, 8.5mm fixing holes.
- The equipotential bonding bar is mounted on insulators fixed on an omega, this system saves time during its implementation; it will no longer be necessary to remove the copper bar during assembly.

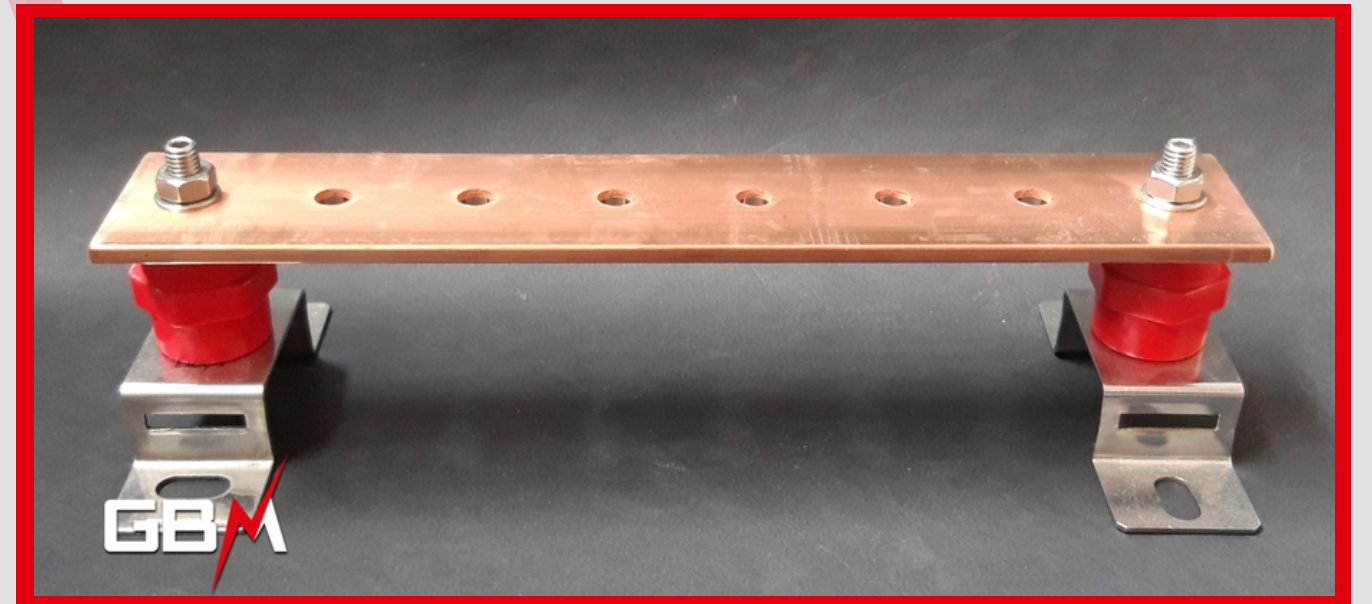

Reference	Length (mm)	Number of connexions	Weight (Kg)	Packaging
BEO6	280	6	0.89	1
BEO10	420	10	1.19	1
BEO15	595	15	1.56	1
BEO20	770	20	1.93	1
BEO25	945	25	2.30	1

* Other configurations possible on request