


Equipotentiality bar on Rail

- 50×5 copper distribution strips, 8.5mm fixing holes.
- The equipotentiality bar is mounted on insulators fixed to a perforated galvanized steel rail to facilitate its installation.

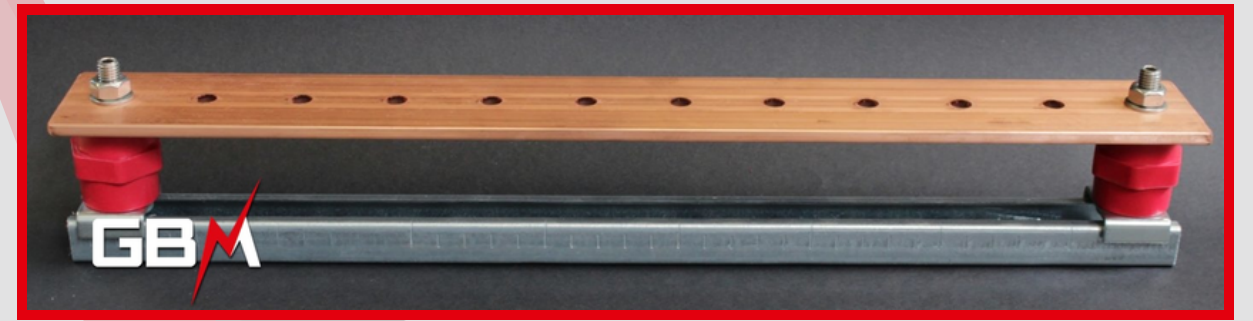

Reference	Length (mm)	Number of connexions	Weight (Kg)	Packaging
BE6	280	6	1.25	1
BE10	420	10	1.75	1
BE15	595	15	2.25	1
BE20	770	20	2.8	1
BE25	945	25	3.35	1

* Other configurations possible on request