


Low voltage insulators (Female / Female)

- Fiberglass / polyester.
- RAL color 3002.
- Silicone free.
- Self-extinguishing according to UL 94-V0.
- Operating temperature: -40 ° C to 130 ° C.
- Water absorption according to (ASTM D570) < 0.3%.

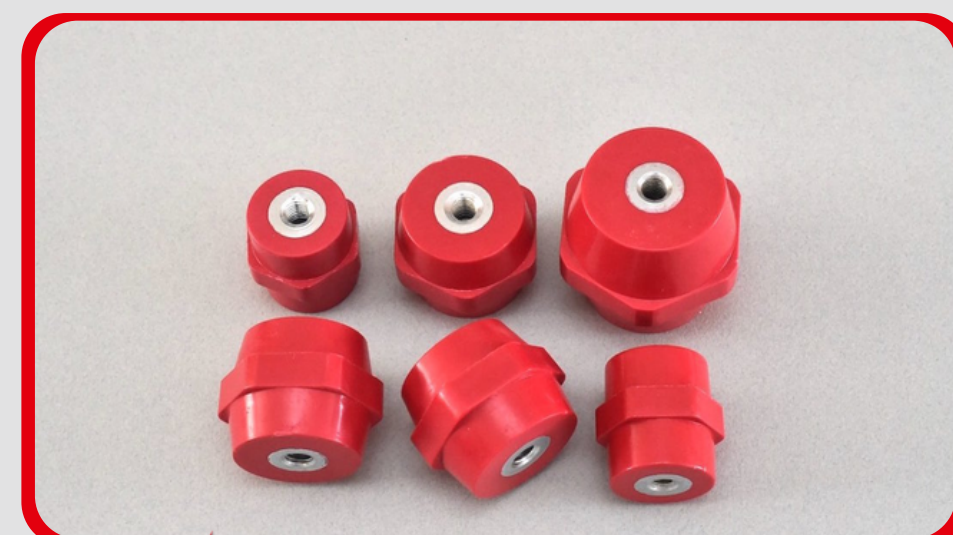

Reference	H (mm)	ØD1	A	F	LF	Nominal AC Voltage	Nominal DC Voltage	Isolation Voltage VAC	Peak	Weight (Kg)	Packaging
ISO416	16	12	15	M4	4	500	600	3000	5500	0.007	50
ISO420	20	15	19	M4	6	750	900	5000	9000	0.01	50
ISO425	25	18	22	M4	6	1000	1200	6000	11000	0.019	50
ISO516	16	12	15	M5	4	500	600	3000	5500	0.007	50
ISO520	20	15	19	M5	6	750	900	5000	9000	0.01	50
ISO525	25	18	22	M5	6	1000	1200	6000	11000	0.019	50
ISO620	20	15	19	M6	6	750	900	5000	9000	0.01	50
ISO625	25	18	22	M6	6	1000	1200	6000	11000	0.02	50
ISO630	30	26	30	M6	9	1200	1500	8000	14000	0.06	25
ISO830	30	26	30	M8	9	1200	1500	8000	14000	0.06	25
ISO635	35	29	32	M6	10	1400	1600	9000	16000	0.10	25
ISO835-P	35	29	32	M8	10	1400	1600	9000	16000	0.10	25
ISO835	35	35	41	M8	10	1400	1600	9000	16000	0.11	25
ISO1035-P	35	29	32	M10	10	1400	1600	9000	16000	0.07	25
ISO1035	35	35	41	M10	10	1400	1600	9000	16000	0.10	25
ISO640	40	34	41	M6	10	1600	1900	10000	18000	0.11	25
ISO840	40	34	41	M8	10	1600	1900	10000	18000	0.11	25
ISO1040-P	40	34	41	M10	10	1600	1900	10000	18000	0.11	25
ISO1240-P	40	34	41	M12	10	1600	1900	10000	18000	0.11	25
ISO1240	40	40	46	M12	10	1600	1900	10000	18000	0.13	25
ISO845	45	38	46	M8	13	1800	2100	11000	20000	0.15	25
ISO1045	45	38	46	M10	13	1800	2100	11000	20000	0.15	25
ISO650	50	30	36	M6	13	2000	2400	12000	21500	0.12	10
ISO850	50	40	50	M8	13	2000	2400	13000	23500	0.20	10

* Other models possible on request.

Low voltage insulators (Female / Female)

Reference	H (mm)	ØD1	A	F	LF	Nominal AC Voltage	Nominal DC Voltage	Isolation Voltage VAC	Peak	Weight (Kg)	Packaging
ISO850-P	50	30	36	M8	13	2000	2400	12000	21500	0.11	10
ISO1050	50	40	50	M10	13	2000	2400	13000	23500	0.18	10
ISO1050-P	50	30	36	M10	15	2000	2400	12000	21500	0.11	10
ISO1250	50	40	50	M12	13	2000	2400	13000	23500	0.18	10
ISO860	60	43	55	M8	15	2400	2800	15000	27000	0.27	10
ISO1060	60	43	55	M10	18	2400	2800	15000	27000	0.27	10
ISO1260	60	43	55	M12	18	2400	2800	15000	27000	0.27	10
ISO865	65	32	41	M8	15	2500	3000	16000	29000	0.17	10
ISO1065	65	32	36	M10	18	2500	3000	16000	29000	0.18	10
ISO1265	65	32	41	M12	18	2500	3000	16000	29000	0.18	10
ISO875	75	38	50	M8	18	3200	3800	20000	36000	0.28	10
ISO1075	75	38	50	M10	18	3200	3800	20000	36000	0.28	10
ISO1080	80	52	65	M10	18	3500	4200	22000	39500	0.45	5
ISO1280	80	52	65	M12	18	3500	4200	22000	39500	0.45	5
ISO12100	100	52	61	M12	18	5000	6000	26000	47000	0.54	5

* Other models possible on request.