


Medium wall heat shrink tubing no adhesive - halogen free

- Restricted: 3/1.
- Temperature for full shrinkage 120°C.
- Operating temperature: -55°C/+110°C.
- Polyolefin.
- Standard color black.
- Packaging in 1 meter bar.

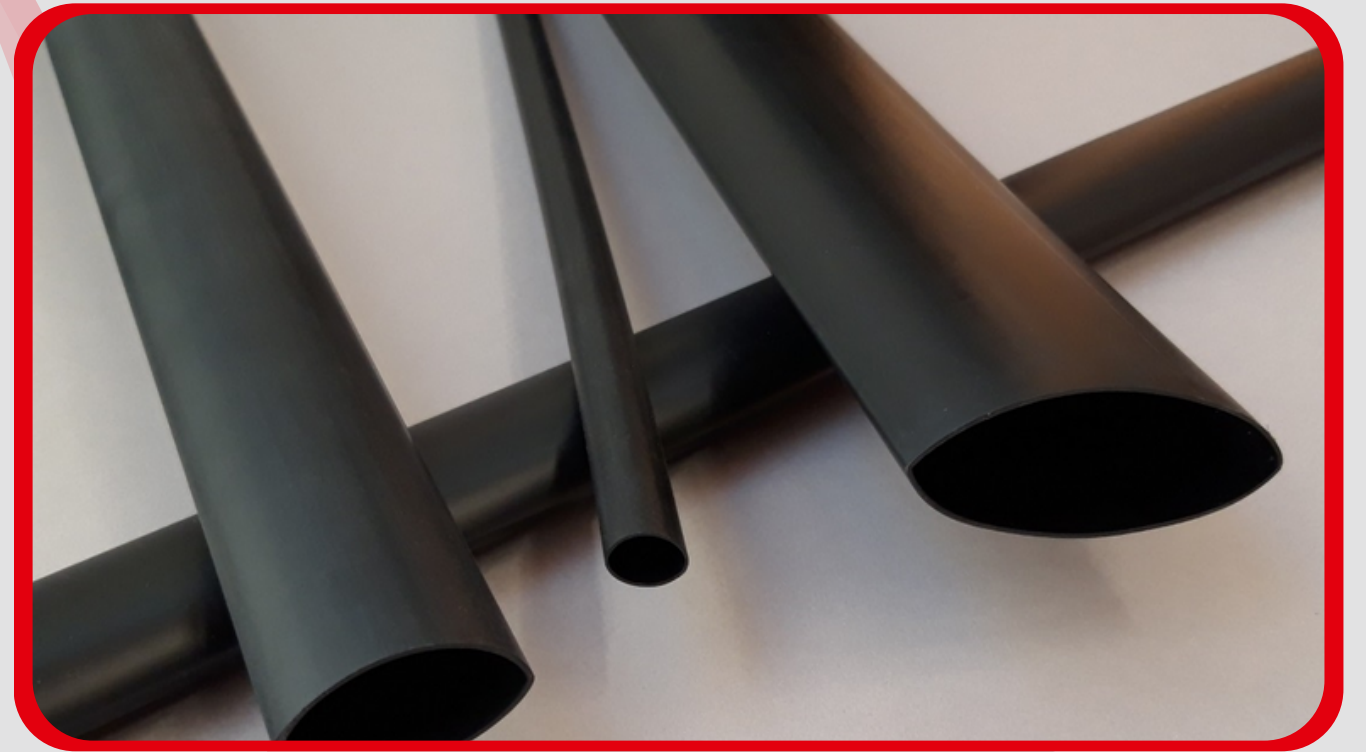

Reference	Min expans. diameter - Max Recover	Wall thickness after shrinkage	Packaging
GPM 12/4	12/4	2.00	10
GPM 22/6	22/6	2.20	10
GPM 33/8	33/8	2.50	10
GPM 40/12	40/12	2.50	5
GPM 55/16	55/16	2.70	5
GPM 75/22	75/22	3.00	5
GPM 95/29	95/29	3.00	5

* Other dimensions possible on request.