


Supports for flat copper busbars

- Brass copper bar supports allowing the belting of ENEDIS, RTE, or private substations.
- Supplied assembled by stainless steel bolts.

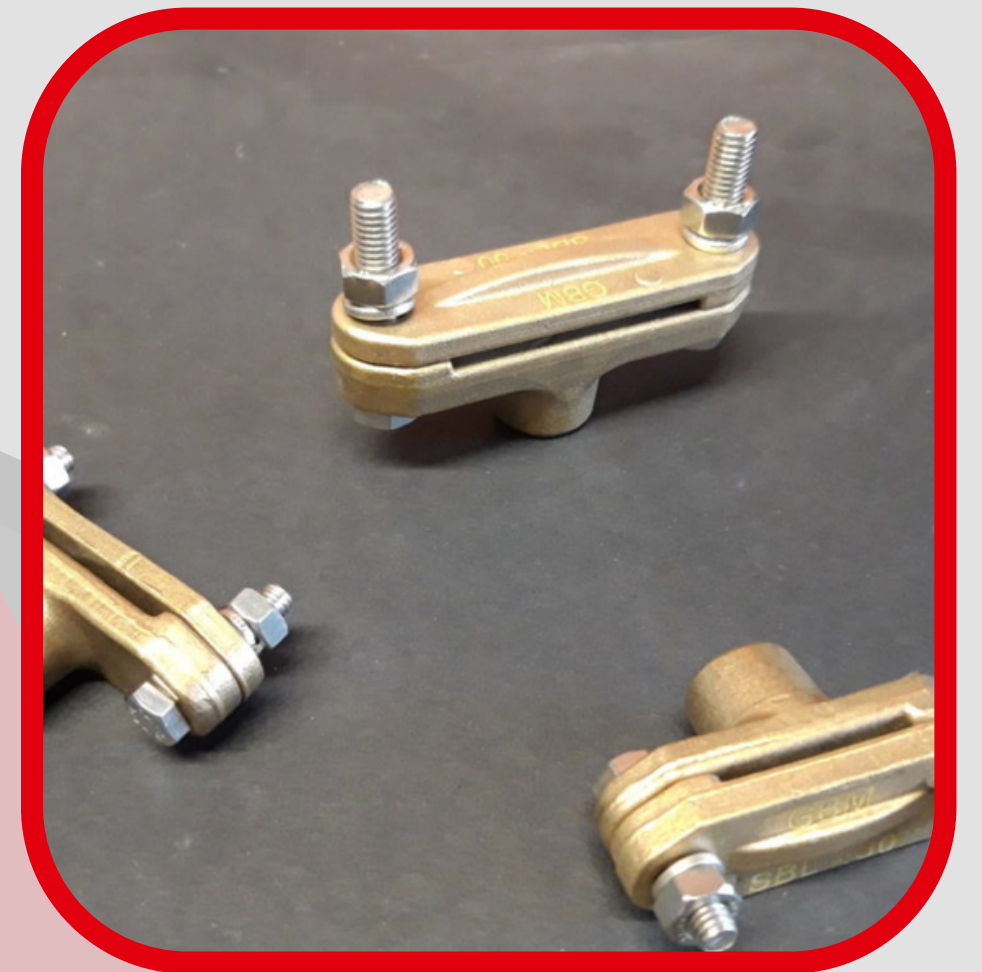

Reference	Max width (mm)	Max thickness (mm)	Threaded base	Bolting size	Weight (Kg)	Packaging
SBL30	30	8	M8	2xM6	0.15	15
SBL40	40	10	M8	2xM6	0.17	15
SBL50	50	10	M10	2xM8	0.31	10