


Tinned C-lugs

- C-lugs are designed to connect copper cables of equal or unequal sections.
- Electrolytic copper material.
- Surface tinned by electrolysis.

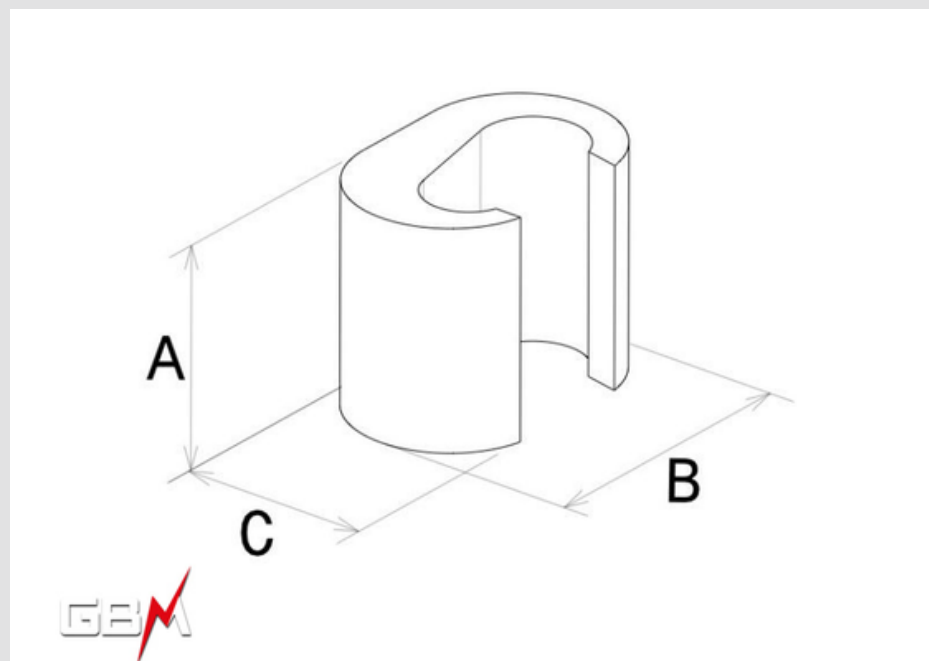

Reference	A (mm)	B (mm)	C (mm)	Conductor capacity *	Weight (Kg/100)	Packaging (Pces)
CE16	17	19.4	12	16-16	2.2	50
CE25-10	17	19.8	13	25-10	2.25	50
CE25PME	19	21	11.9	25-25	2.2	50
CE25	20	24.3	15	25-25	3.8	50
CE35	20	26.5	15	35-35	4.0	50
CE50	20	26.5	17.2	50-50	3.6	25
CE70	28	34	21	70-70	9.2	25
CE75	30	41	26	75-75	15.5	25
CE95	30	41	26	95-95	14.0	25
CE95-35	30	41	26	95-35	15.3	25
CE120	30	45	28	120-120	17	15
CE150	30	45	28	150-150	12.21	15
CE185-95	30	45	28	185-95	16.6	15
CE185	35	54	33	185-185	25	10
CE240	40	54	33.5	240-240	22.0	10

feel free to Contact us if you can't find the information you are looking for.