


# Fixing accessories for public lightning

- Stainless steel straps



| Reference | Width x Thickness (mm) | Weight/Packaging (Kg) | Packaging (Pce) |
|-----------|------------------------|-----------------------|-----------------|
| F104      | 10x0,4                 | 1,8                   | 50m             |
| F107      | 10x0,7                 | 3                     | 50m             |
| F204      | 20x0,4                 | 3,5                   | 50m             |
| F207      | 20x0,7                 | 5,9                   | 50m             |

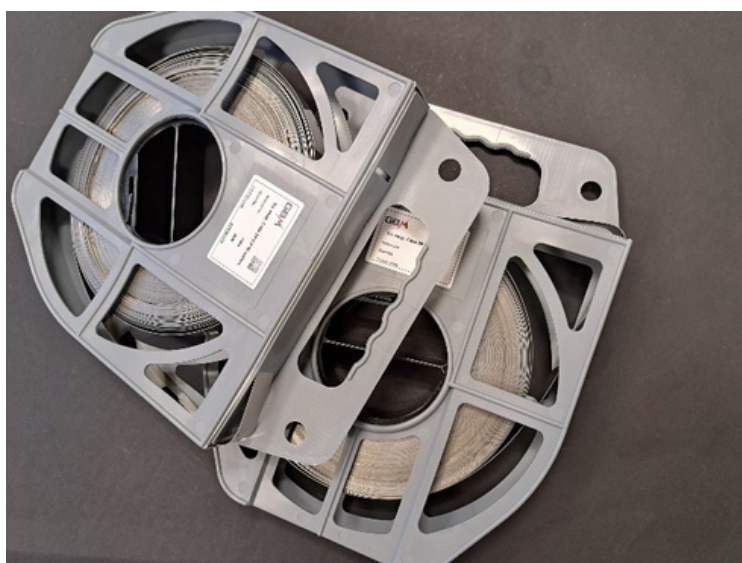

- Stapple for stainless steel strapping



| Reference | Weight/Packaging (Kg) | Packaging |
|-----------|-----------------------|-----------|
| A100      | 0,36                  | 100       |
| A200      | 0,6                   | 100       |

- Protective sheath for strapping



| Reference | Width (mm) | Weight/Packaging (Kg) | Packaging (Pce) |
|-----------|------------|-----------------------|-----------------|
| BPF10     | 10         | 4                     | 10m             |
| BPF20     | 20         | 14                    | 10m             |

# Fixing accessories for public lightning



- Clamp for tensioning and cutting strap



| Reference | Weight/Packaging (Kg) | Packaging (Pce) |
|-----------|-----------------------|-----------------|
| PCF       | 1,4                   | 1               |

- Shears for stainless steel sgtrapping



| Reference | Weight/Packaging (Kg) | Packaging (Pce) |
|-----------|-----------------------|-----------------|
| CF        | 0,56                  | 1               |

- Strapping pliers for installation collars




| Reference | Weight/Packaging (Kg) | Packaging (Pce) |
|-----------|-----------------------|-----------------|
| PCI       | 0.8                   | 1               |

- Stainless steel strap connector



| Reference | Weight/Packaging (Kg) | Packaging(Pce) |
|-----------|-----------------------|----------------|
| RPTI      | 0.05                  | 10             |

- Stainless steel ball clamp

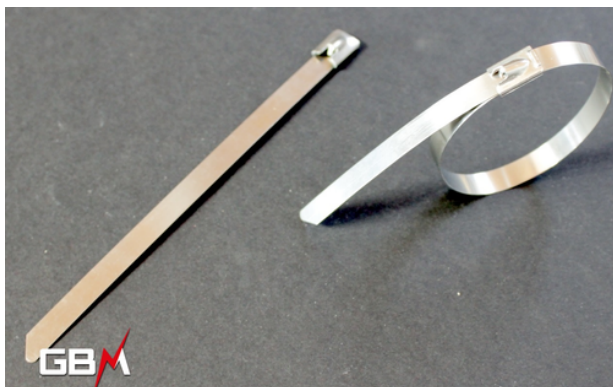

| Reference  | Lenght (mm) | Width (mm) | Max clamping diameter (mm) | Weight/Packaging (Kg) | Packaging (Pces) |
|------------|-------------|------------|----------------------------|-----------------------|------------------|
| CIB7,9-360 | 360         | 7,9        | 102                        | 0,80                  | 50               |
| CIB7,9-520 | 520         | 7,9        | 152                        | 1,10                  | 50               |
| CIB7,9-679 | 679         | 7,9        | 203                        | 1,28                  | 50               |
| CIB7,9-838 | 838         | 7,9        | 254                        | 1,52                  | 50               |